



SCHEDA TECNICA





A - Elemento raggiungi quota

Ø interno mm	S pareti mm	h tot esterna mm	peso cad. Kg
625	120	40	32
625	120	120	58
625	120	240	110

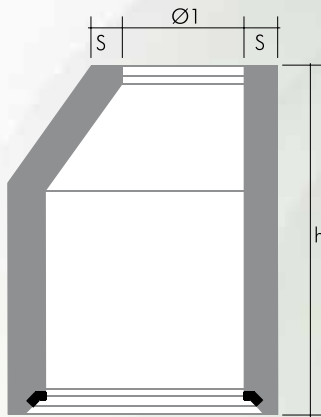

B - Elemento troncoconico monolitico

Ø interno mm	S pareti mm	h tot esterna mm	Ø1 riduzione mm	peso cad. Kg
1000	120	500	625	550
1000	120	750	625	790
1000	120	1000	625	1050
1000	120	1250	625	1320
1000	120	1500	625	1575

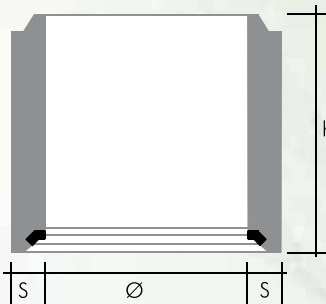



C - Elemento rialzato monolitico

Ø interno mm	S pareti mm	h tot esterna mm	peso cad. Kg
1000	120	250	330
1000	120	500	350
1000	120	750	510
1000	120	1000	1020
1000	120	1250	1340

D - Pozzetto base

Ø interno mm	Ø max immissione mm	S pareti mm	h tot esterna mm	h tot scorrim. mm	peso cad. Kg
1000	150	165	660	410	1650
1000	200	165	660	410	1650
1000	250	165	660	500	1650
1000	300	165	660	500	1650
1000	350	165	660	590	1650
1000	400	165	860	610	2080
1000	500	165	1010	810	2350

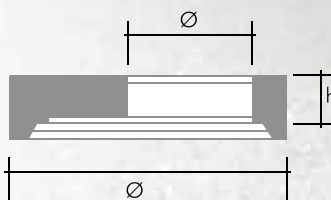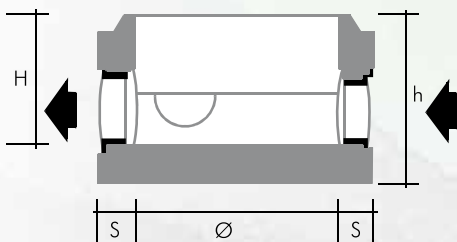

E - Soletta circolare sagomata con incastro

Ø interno mm	h utile mm	Ø foro mm	peso cad. Kg
1320	160	625	680