



SCHEDA TECNICA




A - Elemento raggiungi quota

Ø interno mm	S pareti mm	h tot esterna mm	peso cad. Kg
625	120	40	32
625	120	120	58
625	120	240	110

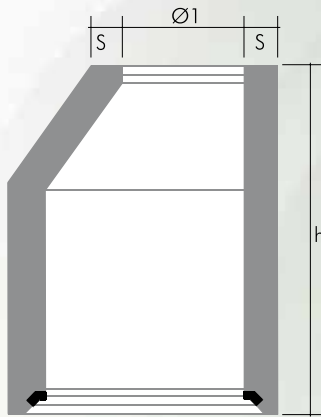


B - Elemento troncoconico monolitico

Ø interno mm	S pareti mm	h tot esterna mm	Ø1 riduzione mm	peso cad. Kg
1200	135	500	625	600
1200	135	750	625	900
1200	135	1000	625	1200
1200	135	1250	625	1500
1200	135	1500	625	1700




C - Elemento rialzato monolitico

Ø interno mm	S pareti mm	h tot esterna mm	peso cad. Kg
1200	135	250	330
1200	135	500	600
1200	135	750	900
1200	135	1000	1200
1200	135	1250	1500

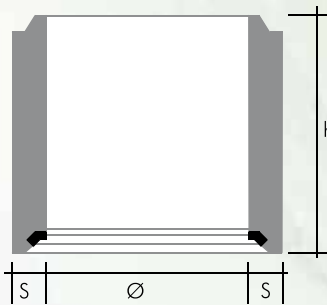

D - Pozzetto base

Ø interno mm	Ø max immissione mm	S pareti mm	h tot esterna mm	h tot scorrim. mm	peso cad. Kg
1200	150	190	660	410	1650
1200	200	190	660	410	1650
1200	250	190	660	500	1650
1200	300	190	660	500	1650
1200	350	190	660	590	1650
1200	400	190	860	610	2080
1200	500	190	1010	810	2350

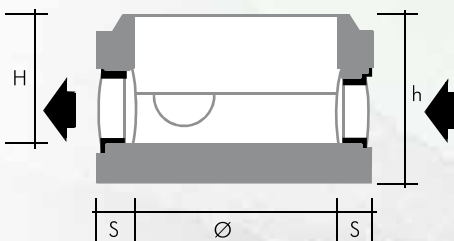

E - Soletta circolare sagomata con incastro

Ø interno mm	h utile mm	Ø foro mm	peso cad. Kg
1320	160	625	680

